



IR 抛光氟化钙 CaF_2 平凸正透镜 (直径 25mm 焦距 130mm)



描述

氟化钙在紫外到中红外 (250nm~7um) 之间都有很高的透射率, 所以广泛被用于制造棱镜, 透镜, 窗片, 氟化钙透镜具有低折射率, 高激光损伤阈值, 低同轴与径向应力双折射特性, 适合于准分子激光器使用, 或者集成于红外系统上。且氟化钙也备有低可溶性, 也可抵抗恶劣环境。氟化钙的抛光面可以工作数年之久, 氟化钙的硬度是氟化钡的两倍, 而且抗热冲击能力更强。

产品特点

透射波长范围广, 低折射率, 高透射率, 高损伤阈值, 低可溶性

产品型号

CAF25LENS130





应用领域

中红外QCL激光器

中红外激光光路搭建

核心参数

规格尺寸	焦距F.L.	曲率	透镜等级
25mm	130mm @ 3μm	55.35 (±2%)	IR 平凸

详细参数

名称	参数
透射范围	0.13~10um
折射率	1.39908 at 5um
反射损耗	5.4% at 5um
吸收系数	$7.8 \times 10^{-4} \text{cm}^{-1}$ @ 2.7um
吸收峰	35um
dn/dT	$-10.6 \times 10^{-6} / ^\circ\text{C}$
dn/du=0	dn/du=0
密度	3.18g/cc

熔点	1360℃
导热率	9.71Wm ⁻¹ K ⁻¹
热膨胀	18.85×10 ⁻⁶ /℃
硬度	Knoop 158.3
比热容	854J Kg ⁻¹ K ⁻¹
介电常数	6.76 at 1MHz
杨氏模量	75.8GPa
剪切模量	33.77GPa
体积模量	82.71GPa
弹性系数	C ₁₁ =164 ,C ₁₂ =53 ,C ₄₄ =33.7
表现弹性极限	36.54MPa
泊松比	0.26
溶解度	0.0017g/100g with, 20 °C
分子量	78.08

类型/结构	立方裂解
反射损耗	5.4% at 5um


折射率:(No=Ordinary Ray 普通射线)


um	No	um	No	um	No
0.54	2.6754	0.58	2.6312	0.62	2.5994
0.66	2.5755	0.7	2.5568	0.74	2.5418
0.78	2.5295	0.82	2.5193	0.86	2.5107
0.90	2.5034	0.94	2.4971	0.98	2.4916
1.0	2.4892	1.4	2.4609	1.8	2.4496
2.2	2.4437	2.6	2.4401	3.0	2.4376
3.4	2.4356	3.8	2.4339	4.2	2.4324
4.6	2.4309	5.0	2.4295	5.4	2.4281
5.8	2.4266	6.2	2.4251	6.6	2.4235
7.0	2.4218	7.4	2.4201	7.8	2.4183

8.2	2.4163	8.6	2.4143	9.0	2.4122
9.4	2.4100	9.8	2.4077	10.2	2.4053
10.6	2.4028	11.0	2.4001	11.4	2.3974
11.8	2.3945	12.2	2.3915	12.6	2.3883
13.0	2.3850	13.4	2.3816	13.8	2.3781
14.2	2.3744	14.6	2.3705	15.0	2.3665
15.4	2.3623	15.8	2.3579	16.2	2.3534
16.6	2.3487	17.0	2.3438	17.4	2.3387
17.8	2.3333	18.2	2.3278		

特性曲线

光谱透射图

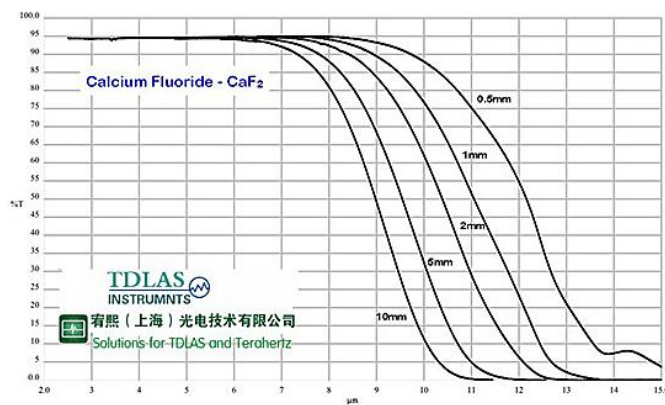

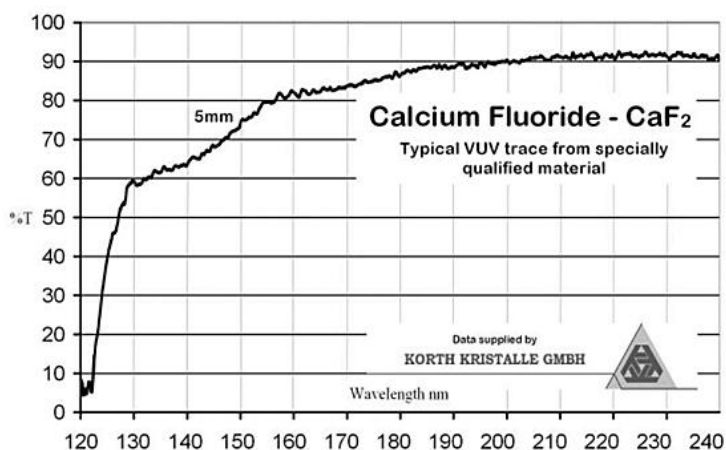

订购信息

订购型号	规格	曲率	焦距	CaF2 等级	参数
CAF12.7L ENS10U	12.7mm Ø	10.16 (±2%)	10mm @ 300nm	UV 双凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 300mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter:25.0mm (±0.1mm) Centre Thickness:2.6mm (±0.1mm) Radius of Curvature 1:120 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.277mm Back F.L.276mm Wavelength0.633µm 280mm 278mm 1.064µm 287mm 286mm 3.0µm 300mm 299mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from the lens formula. BFL is referenced from the lens surface.
CAF12.7L ENS12	12.7mm Ø	12.0 (±2%)	12.7mm @ 5µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 12.7mm Ø X 12.7mm F.L. @ 0.633µm MATERIAL: IR Grade CaF₂ Diameter:12.7mm (+0.0/-0.127mm) Centre Thickness:6.0mm (±0.127mm) Radius of Curvature 1:12.0 (±2%) Radius of Curvature 2:12.0 (±2%) S/D:60/40 Edge thickness:1.5mm (derived) Effective F.L.15.0mm Back F.L.12.7mm Wavelength0.633µm 15.5mm 13.2mm 3.0µm 16.2mm 13.9mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from the lens formula. BFL is referenced from the lens surface.

CAF12.7L	12.7mm	12.0	12mm @	UV 双凸																
ENS12U	Ø	(±2%)	300nm																	
CAF12.7L	12.7mm	40.32	100mm	IR 平凸	CALCIUM FLUORIDE BI-CONVEX LENS 25mm Ø X 100mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 4.0mm (±0.1mm) Radius of Curvature 1: 78.94 (±2%) Radius of Curvature 2: 78.94 (±2%) S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>92mm</td><td>90mm</td><td>0.633µm</td></tr><tr><td>93mm</td><td>91mm</td><td>1.064µm</td></tr><tr><td>95mm</td><td>94mm</td><td>3.0µm</td></tr><tr><td>100mm</td><td>98mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±2% to nearest mm EP.L. from the lens formula. BP.L. is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	92mm	90mm	0.633µm	93mm	91mm	1.064µm	95mm	94mm	3.0µm	100mm	98mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
92mm	90mm	0.633µm																		
93mm	91mm	1.064µm																		
95mm	94mm	3.0µm																		
100mm	98mm	5.0µm																		
ENS100	Ø	(±2%)	@ 5µm																	
CAF16LE	16.0mm	73.90	90mm @	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 16mm Ø X 90mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 16.0mm (±0.1mm) Centre Thickness: 3.0mm (±0.1mm) Radius of Curvature 1: 73.90 (±2%) Radius of Curvature 2: 73.90 (±2%) S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>86mm</td><td>85mm</td><td>0.633µm</td></tr><tr><td>86mm</td><td>85mm</td><td>1.064µm</td></tr><tr><td>88mm</td><td>88mm</td><td>3.0µm</td></tr><tr><td>93mm</td><td>92mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±2% to nearest mm EP.L. from the lens formula. BP.L. is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	86mm	85mm	0.633µm	86mm	85mm	1.064µm	88mm	88mm	3.0µm	93mm	92mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
86mm	85mm	0.633µm																		
86mm	85mm	1.064µm																		
88mm	88mm	3.0µm																		
93mm	92mm	5.0µm																		
NS90	Ø	(±2%)	3µm																	
CAF18.5L	18.5mm	12.6	26mm @	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 18.5mm Ø X 26mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 18.7mm (±0.25mm) Centre Thickness: 5.0mm (±0.2mm) Centration 3 Arc Minutes Radius of Curvature 1: 12.6 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>29.1mm</td><td>25.6mm</td><td>0.633µm</td></tr><tr><td>30.2mm</td><td>26.6mm</td><td>3.0µm</td></tr><tr><td>31.6mm</td><td>28.0mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±2% to nearest mm EP.L. from the lens formula. BP.L. is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	29.1mm	25.6mm	0.633µm	30.2mm	26.6mm	3.0µm	31.6mm	28.0mm	5.0µm			
Effective F.L.	Back F.L.	Wavelength																		
29.1mm	25.6mm	0.633µm																		
30.2mm	26.6mm	3.0µm																		
31.6mm	28.0mm	5.0µm																		
ENS26	Ø	(±2%)	3µm																	

CAF20LE NS50	20mm Ø	19.95 (±2%)	50mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 20mm Ø x 50mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 20.0mm (±0.1mm) Centre Thickness: 4.0mm (±0.1mm) Radius of Curvature 1: 19.95 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.3mm (derived) Effective F.L. 46mm Back F.L. 43mm Wavelength 0.633µm 47mm 44mm 1.064µm 48mm 45mm 3.0µm 50mm 47mm 5.0µm Paraxial F.L. Tolerances ±0.7% to nearest mm. ED, from this lens formula. BFL is referenced from the back lens surface.
CAF25LE NS25U	25mm Ø	21.53 (±2%)	25mm @ 350nm	UV 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 25mm Ø X 25mm F.L. @ 0.35µm MATERIAL: UV Grade CaF₂ Diameter: 25.0mm (+0.0/-0.1mm) Centre Thickness: 10mm (±0.1mm) Radius of Curvature 1: 21.53 (±2%) Radius of Curvature 2: 21.53 (±2%) S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. 26.0mm Pr. Plane F.L. 25.0mm Back F.L. 22.2mm Wavelength 0.35µm 26.8mm 23.0mm 0.633µm Paraxial F.L. Tolerances ±0.7% ED, from this lens formula. BFL is referenced from the lens surface.
CAF25LE NS25	25mm Ø	20.80 (±2%)	25.4mm @ 3µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 25mm Ø X 25.4mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (+0.0/-0.1mm) Centre Thickness: 10mm (±0.1mm) Radius of Curvature 1: 20.80 (±2%) Radius of Curvature 2: 20.80 (±2%) S/D: 60/40 Edge thickness: 1.6mm (derived) Effective F.L. 25.9mm Pr. Plane F.L. Back F.L. 22.2mm Wavelength 0.633µm 26.2mm 22.4mm 1.064µm 26.8mm 25.4mm 23.0mm 3.0µm 28.0mm 24.1mm 5.0µm Paraxial F.L. Tolerances ±0.7% ED, from this lens formula. BFL is referenced from the lens surface.
CAF25LE NS50B	25mm Ø	39.1 (±2%)	50mm @ 5µm	IR 双凸	
CAF25LE NS50	25mm Ø	20.9 (±2%)	50mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø x 50mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 6.1mm (±0.1mm) Radius of Curvature 1: 20.9 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. 48mm Back F.L. 44mm Wavelength 0.633µm 49mm 45mm 1.064µm 50mm 45mm 3.0µm 52mm 48mm 5.0µm Paraxial F.L. Tolerances ±0.7% to nearest mm. ED, from this lens formula. BFL is referenced from the back lens surface.

CAF25LE NS50U	25mm Ø	22.96 (±2%)	50mm @ 350nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø x 50mm F.L. @ 0.35µm MATERIAL: UV Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 5.7mm (±0.1mm) Radius of Curvature 1: 22.96mm (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>51mm</td><td>47mm</td><td>0.35 µm</td></tr><tr><td>53mm</td><td>49mm</td><td>0.633µm</td></tr><tr><td>54mm</td><td>49mm</td><td>1.064µm</td></tr><tr><td>55mm</td><td>51mm</td><td>3.0µm</td></tr><tr><td>57mm</td><td>53mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±0% to nearest mm. EFL from the lens formula. BFL is referenced from the back lens surface.	Effective F.L.	Back F.L.	Wavelength	51mm	47mm	0.35 µm	53mm	49mm	0.633µm	54mm	49mm	1.064µm	55mm	51mm	3.0µm	57mm	53mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																					
51mm	47mm	0.35 µm																					
53mm	49mm	0.633µm																					
54mm	49mm	1.064µm																					
55mm	51mm	3.0µm																					
57mm	53mm	5.0µm																					
CAF25LE NS75	25mm Ø	31.35 (±2%)	75mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø x 75mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 4.6mm (±0.1mm) Radius of Curvature 1: 31.35 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>72mm</td><td>69mm</td><td>0.633µm</td></tr><tr><td>73mm</td><td>70mm</td><td>1.064µm</td></tr><tr><td>75mm</td><td>72mm</td><td>3.0µm</td></tr><tr><td>78mm</td><td>75mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±0% to nearest mm. EFL from the lens formula. BFL is referenced from the back lens surface.	Effective F.L.	Back F.L.	Wavelength	72mm	69mm	0.633µm	73mm	70mm	1.064µm	75mm	72mm	3.0µm	78mm	75mm	5.0µm			
Effective F.L.	Back F.L.	Wavelength																					
72mm	69mm	0.633µm																					
73mm	70mm	1.064µm																					
75mm	72mm	3.0µm																					
78mm	75mm	5.0µm																					
CAF25LE NS100B	25mm Ø	78.94 (±2%)	100mm @ 3µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 25mm Ø X 100mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 4.0mm (±0.1mm) Radius of Curvature 1: 78.94 (±2%) Radius of Curvature 2: 78.94 (±2%) S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>92mm</td><td>90mm</td><td>0.633µm</td></tr><tr><td>93mm</td><td>91mm</td><td>1.064µm</td></tr><tr><td>95mm</td><td>94mm</td><td>3.0µm</td></tr><tr><td>100mm</td><td>98mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±0% to nearest mm. EFL from the lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	92mm	90mm	0.633µm	93mm	91mm	1.064µm	95mm	94mm	3.0µm	100mm	98mm	5.0µm			
Effective F.L.	Back F.L.	Wavelength																					
92mm	90mm	0.633µm																					
93mm	91mm	1.064µm																					
95mm	94mm	3.0µm																					
100mm	98mm	5.0µm																					
CAF25LE NS100	25mm Ø	43.73 (±2%)	100mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 50mm Ø X 100mm F.L. @ 1µm MATERIAL: IR Grade CaF₂ Diameter: 50.0mm (±0.1mm) Centre Thickness: 10.0mm (±0.1mm) Radius of Curvature 1: 43.0 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>99mm</td><td>92mm</td><td>0.633µm</td></tr><tr><td>100mm</td><td>93mm</td><td>1.064µm</td></tr><tr><td>103mm</td><td>96mm</td><td>3.0µm</td></tr><tr><td>108mm</td><td>101mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±0% to nearest mm. EFL from the lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	99mm	92mm	0.633µm	100mm	93mm	1.064µm	103mm	96mm	3.0µm	108mm	101mm	5.0µm			
Effective F.L.	Back F.L.	Wavelength																					
99mm	92mm	0.633µm																					
100mm	93mm	1.064µm																					
103mm	96mm	3.0µm																					
108mm	101mm	5.0µm																					
CAF25LE NS100U	25mm Ø	43.73 (±2%)	100mm @ 350nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 50mm Ø X 100mm F.L. @ 1µm MATERIAL: IR Grade CaF₂ Diameter: 50.0mm (±0.1mm) Centre Thickness: 10.0mm (±0.1mm) Radius of Curvature 1: 43.0 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>99mm</td><td>92mm</td><td>0.633µm</td></tr><tr><td>100mm</td><td>93mm</td><td>1.064µm</td></tr><tr><td>103mm</td><td>96mm</td><td>3.0µm</td></tr><tr><td>108mm</td><td>101mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±0% to nearest mm. EFL from the lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	99mm	92mm	0.633µm	100mm	93mm	1.064µm	103mm	96mm	3.0µm	108mm	101mm	5.0µm			
Effective F.L.	Back F.L.	Wavelength																					
99mm	92mm	0.633µm																					
100mm	93mm	1.064µm																					
103mm	96mm	3.0µm																					
108mm	101mm	5.0µm																					

CAF25LE NS130	25mm Ø	55.35 (±2%)	130mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 130mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 3.0mm (±0.1mm) Radius of Curvature 1: 55.35 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.5mm (derived) Effective F.L. 128mm Back F.L. 126mm Wavelength 0.633µm 129mm 126mm 1.064µm 133mm 130mm 3.0µm 139mm 136mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm. EFL from the lens formula. BFL is referenced from the lens surface.
CAF25LE NS150	25mm Ø	61.0 (±2%)	150mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 150mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 3.3mm (±0.1mm) Radius of Curvature 1: 61.0 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. 141mm Back F.L. 139mm Wavelength 0.633µm 142mm 140mm 1.064µm 146mm 144mm 3.0µm 152mm 150mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm. EFL from the lens formula. BFL is referenced from the lens surface.
CAF25LE NS150U	25mm Ø	69.75 (±2%)	150mm @ 350nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 150mm F.L. @ 350nm MATERIAL: UV Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 3.1mm (±0.1mm) Radius of Curvature 1: 69.75 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. 156mm Back F.L. 154mm Wavelength 0.350µm 161mm 159mm 0.633µm 163mm 161mm 1.064µm 167mm 165mm 3.0µm 175mm 173mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm. EFL from the lens formula. BFL is referenced from the lens surface.
CAF25LE NS200U	25mm Ø	90.39 (±2%)	200mm @ 350nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 200mm F.L. @ 350nm MATERIAL: UV Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.9mm (±0.1mm) Radius of Curvature 1: 90.39 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. 202mm Back F.L. 200mm Wavelength 0.350µm 209mm 207mm 0.633µm 210mm 209mm 1.064µm 217mm 214mm 3.0µm 226mm 224mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm. EFL from the lens formula. BFL is referenced from the lens surface.

CAF25LE NS300	25mm Ø	120.0 (±2%)	300mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 300mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.6mm (±0.1mm) Radius of Curvature 1: 120 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>277mm</td><td>276mm</td><td>0.633µm</td></tr><tr><td>280mm</td><td>278mm</td><td>1.064µm</td></tr><tr><td>287mm</td><td>286mm</td><td>3.0µm</td></tr><tr><td>300mm</td><td>299mm</td><td>5.0µm</td></tr></table> Parallel F.L. Tolerances ±2% to nearest mm. EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	277mm	276mm	0.633µm	280mm	278mm	1.064µm	287mm	286mm	3.0µm	300mm	299mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
277mm	276mm	0.633µm																		
280mm	278mm	1.064µm																		
287mm	286mm	3.0µm																		
300mm	299mm	5.0µm																		
CAF25LE NS500	25mm Ø	202.02 (±2%)	500mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 500mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.4mm (±0.1mm) Radius of Curvature 1: 202 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>467mm</td><td>465mm</td><td>0.633µm</td></tr><tr><td>471mm</td><td>469mm</td><td>1.064µm</td></tr><tr><td>483mm</td><td>482mm</td><td>3.0µm</td></tr><tr><td>506mm</td><td>504mm</td><td>5.0µm</td></tr></table> Parallel F.L. Tolerances ±2% to nearest mm. EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	467mm	465mm	0.633µm	471mm	469mm	1.064µm	483mm	482mm	3.0µm	506mm	504mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
467mm	465mm	0.633µm																		
471mm	469mm	1.064µm																		
483mm	482mm	3.0µm																		
506mm	504mm	5.0µm																		
CAF25.4L ENS200	25.4mm Ø	80.7 (±2%)	200mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25.4mm Ø X 200mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.4mm (+0.0 / -0.127mm) Centre Thickness: 2.64mm (±0.127mm) Radius of Curvature 1: 80.7 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.65mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>187mm</td><td>185mm</td><td>0.633µm</td></tr><tr><td>188mm</td><td>186mm</td><td>1.064µm</td></tr><tr><td>193mm</td><td>191mm</td><td>3.0µm</td></tr><tr><td>202mm</td><td>200mm</td><td>5.0µm</td></tr></table> Parallel F.L. Tolerances ±2% to nearest mm. EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	187mm	185mm	0.633µm	188mm	186mm	1.064µm	193mm	191mm	3.0µm	202mm	200mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
187mm	185mm	0.633µm																		
188mm	186mm	1.064µm																		
193mm	191mm	3.0µm																		
202mm	200mm	5.0µm																		
CAF27LE NS50	27mm Ø	43.10 (±2%)	50mm @ 3µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 27mm Ø X 50mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 27.0mm (±0.1mm) Centre Thickness: 6.4mm (±0.1mm) Radius of Curvature 1: 43.10 (±2%) Radius of Curvature 2: 43.10 (±2%) S/D: 60/40 Edge thickness: 2.1mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>51mm</td><td>48.7mm</td><td>0.633µm</td></tr><tr><td>51mm</td><td>49.2mm</td><td>1.064µm</td></tr><tr><td>53mm</td><td>50.5mm</td><td>3.0µm</td></tr><tr><td>55mm</td><td>52.8mm</td><td>5.0µm</td></tr></table> Parallel F.L. Tolerances ±2% to nearest mm. EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	51mm	48.7mm	0.633µm	51mm	49.2mm	1.064µm	53mm	50.5mm	3.0µm	55mm	52.8mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
51mm	48.7mm	0.633µm																		
51mm	49.2mm	1.064µm																		
53mm	50.5mm	3.0µm																		
55mm	52.8mm	5.0µm																		

CAF30LE NS70	30mm Ø	57.00 (±2%)	70mm @ 4µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 30mm Ø X 70mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 30.0mm (±0.1mm) Centre Thickness: 6.0mm (±0.1mm) Radius of Curvature 1: 57.0 (±2%) Radius of Curvature 2: 57.0 (±2%) S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. 67mm Back F.L. 65mm Wavelength 0.633µm 67mm 65mm 1.064µm 69mm 67mm 3.0µm 72mm 70mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from the lens formula. BFL is referenced from the lens surface.
CAF31.5L ENS60	31.5mm Ø	27.50 (±2%)	60mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 31.5mm Ø X 60mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 31.5mm (±0.1mm) Centre Thickness: 6.8mm (±0.1mm) Radius of Curvature 1: 27.5 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.8mm (derived) Effective F.L. 64mm Back F.L. 59mm Wavelength 0.633µm 64mm 59mm 1.064µm 65mm 61mm 3.0µm 69mm 64mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from the lens formula. BFL is referenced from the lens surface.
CAF38.1L ENS75	38.1mm Ø	33.84 (±2%)	75mm @ 4.5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 75mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 38.1mm (±0.1mm) Centre Thickness: 9.0mm (±0.1mm) Radius of Curvature 1: 33.84 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 3.1mm (derived) Effective F.L. 78mm Back F.L. 72mm Wavelength 0.633µm 78mm 73mm 1.064µm 81mm 75mm 3.0µm 85mm 78mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from the lens formula. BFL is referenced from the lens surface.
CAF38.1L ENS75U	38.1mm Ø	33.84 (±2%)	66mm @ 248nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 75mm F.L. @ 3µm* MATERIAL: UV Grade CaF₂ Diameter: 38.1mm (±0.1mm) Centre Thickness: 9.0mm (±0.1mm) Radius of Curvature 1: 33.84 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 3.1mm (derived) Effective F.L. 72mm Back F.L. 66mm Wavelength 0.248µm 78mm 72mm 0.633µm 79mm 73mm 1.064µm 81mm 75mm 3.0µm 85mm 78mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from the lens formula. BFL is referenced from the lens surface.

CAF38.1L	38.1mm	68.16	160mm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 160mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 38.1mm (+0.1 / -0.2mm) Centre Thickness: 4.5mm (±0.1mm) Radius of Curvature 1: 68.16 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.8mm (derived) Effective F.L. Back F.L. Wavelength 157mm 154mm 0.633µm 159mm 156mm 1.064µm 163mm 160mm 3.0µm 171mm 167mm 5.0µm Partial F.L. Tolerances ±2% to nearest mm EFL from this lens formula. BFL is referenced from the lens surface.
ENS160	Ø	(±2%)	@ 3µm		
CAF38.1L	38.1mm	100	215mm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 250mm F.L. @ 5µm MATERIAL: UV Grade CaF₂ Diameter: 38.1mm (±0.1mm) Centre Thickness: 3.8mm (±0.1mm) Radius of Curvature 1: 100.0 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. Back F.L. Wavelength 213mm 211mm 0.246µm 231mm 229mm 0.633µm 233mm 231mm 1.064µm 240mm 237mm 3.0µm 250mm 247mm 5.0µm Partial F.L. Tolerances ±2% to nearest mm EFL from this lens formula. BFL is referenced from the lens surface.
ENS250U	Ø	(±2%)	@ 248nm		
CAF38.1L	38.1mm	190.35	475mm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 475mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 38.1mm (+0.05 / -0.0mm) Centre Thickness: 4.0mm (±0.1mm) Radius of Curvature 1: 190.35 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 3.0mm (derived) Effective F.L. Back F.L. Wavelength 440mm 437mm 0.633µm 444mm 442mm 1.064µm 456mm 453mm 3.0µm 477mm 474mm 5.0µm Partial F.L. Tolerances ±2% to nearest mm EFL from this lens formula. BFL is referenced from the lens surface.
ENS475	Ø	(±2%)	@ 5µm		
CAF40LE	40mm Ø	50.25	120mm	UV 平凸	
NS120		(±2%)	@ 3µm		
CAF40LE	40mm Ø	64 (±2%)	150mm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 40mm Ø X 150mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 40.0mm (±0.1mm) Centre Thickness: 4.1mm (±0.1mm) Radius of Curvature 1: 64.0 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.0mm (derived) Effective F.L. Back F.L. Wavelength 148mm 145mm 0.633µm 149mm 146mm 1.064µm 153mm 150mm 3.0µm 160mm 157mm 5.0µm Partial F.L. Tolerances ±2% to nearest mm EFL from this lens formula. BFL is referenced from the lens surface.
NS150			@ 3µm		

CAF40LE NS200	40mm Ø	85 (±2%)	200mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 40mm Ø X 200mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter:40.0mm (±0.1mm) Centre Thickness:3.3mm (±0.1mm) Radius of Curvature 1:85.0 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:1.0mm (derived) Effective F.L.196mm Back F.L.194mm Wavelength0.633µm 198mm 196mm 1.064µm 203mm 201mm 3.0µm 212mm 210mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF40LE NS330	40mm Ø	138 (±2%)	330mm @ 3µm	IR 平凸	
CAF40LE NS440	40mm Ø	187 (±2%)	440mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 40mm Ø X 440mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter:40.0mm (±0.1mm) Centre Thickness:2.0mm (±0.1mm) Radius of Curvature 1:187.0 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:1.0mm (derived) Effective F.L.432mm Back F.L.431mm Wavelength0.633µm 436mm 435mm 1.064µm 448mm 446mm 3.0µm 468mm 467mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF50LE NS80	50mm Ø	65.6 (±2%)	80mm @ 5µm	IR 平凸	CALCIUM FLUORIDE BI-CONVEX LENS 50mm Ø X 80mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter:50.0mm (±0.1mm) Centre Thickness:19.9mm (±0.1mm) Radius of Curvature 1:65.6 (±2%) Radius of Curvature 2:65.6 (±2%) S/D:60/40 Edge thickness:10mm (derived) Effective F.L.79mm Back F.L.72mm Wavelength0.633µm 80mm 73mm 1.064µm 82mm 75mm 3.0µm 86mm 78mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF50LE NS100	50mm Ø	43.0 (±2%)	100mm @ 1µm	IR 双凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 50mm Ø X 100mm F.L. @ 1µm MATERIAL: IR Grade CaF₂ Diameter:50.0mm (±0.1mm) Centre Thickness:10.0mm (±0.1mm) Radius of Curvature 1:43.0 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.99mm Back F.L.92mm Wavelength0.633µm 100mm 93mm 1.064µm 103mm 96mm 3.0µm 108mm 101mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.

CAF50LE NS135	50mm Ø	57.0 (±2%)	135mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 50mm Ø X 135mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter:50.0mm (±0.1mm) Centre Thickness:7.8mm (±0.1mm) Radius of Curvature 1:57 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>132mm</td><td>126mm</td><td>0.633µm</td></tr><tr><td>133mm</td><td>128mm</td><td>1.064µm</td></tr><tr><td>136mm</td><td>131mm</td><td>3.0µm</td></tr><tr><td>143mm</td><td>137mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±2% to nearest mm. D.F.L. from this lens formula. D.F.L. is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	132mm	126mm	0.633µm	133mm	128mm	1.064µm	136mm	131mm	3.0µm	143mm	137mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
132mm	126mm	0.633µm																		
133mm	128mm	1.064µm																		
136mm	131mm	3.0µm																		
143mm	137mm	5.0µm																		
CAF50LE NS250	50mm Ø	198.9 (±2%)	250mm @ 5µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 50mm Ø X 250mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter:50.0mm (±0.1mm) Centre Thickness:6.2mm (±0.1mm) Radius of Curvature 1:198.9 (±2%) Radius of Curvature 2:198.9 (±2%) S/D:60/40 Edge thickness:3mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>231mm</td><td>229mm</td><td>0.633µm</td></tr><tr><td>233mm</td><td>231mm</td><td>1.064µm</td></tr><tr><td>239mm</td><td>237mm</td><td>3.0µm</td></tr><tr><td>250mm</td><td>248mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±2% to nearest mm. D.F.L. from this lens formula. D.F.L. is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	231mm	229mm	0.633µm	233mm	231mm	1.064µm	239mm	237mm	3.0µm	250mm	248mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
231mm	229mm	0.633µm																		
233mm	231mm	1.064µm																		
239mm	237mm	3.0µm																		
250mm	248mm	5.0µm																		


CaF₂ 负透镜



订购信息:

订购型号	规格	曲率	焦距	CaF ₂ 等级	参数
CAF25LE NS-50	25mm Ø	-20.40 (±2%)	-50mm @ 3µm	IR 平凹	CALCIUM FLUORIDE PLANO-CONCAVE LENS 25mm Ø X -50mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 3.0mm (±0.1mm) Radius of Curvature 1: -20.40 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 7.3mm (derived) Effective F.L. Back F.L. Wavelength -47mm -49mm 0.633µm -48mm -50mm 1.064µm -49mm -51mm 3.0µm -51mm -53mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS-100	25mm Ø	-40.32 (±2%)	-100m m @ 3µm	IR 平凹	CALCIUM FLUORIDE PLANO-CONCAVE LENS 25mm Ø X -100mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.0mm (±0.1mm) Radius of Curvature 1: -40.32 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 3.8mm (derived) Effective F.L. Back F.L. Wavelength -93mm -96mm 0.633µm -94mm -96mm 1.064µm -97mm -98mm 3.0µm -101mm -102mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS-150	25mm Ø	-59.85 (±2%)	-150m m @ 5µm	IR 平凹	CALCIUM FLUORIDE PLANO-CONCAVE LENS 25mm Ø X -150mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.1mm (±0.1mm) Radius of Curvature 1: -59.85 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 3.3mm (derived) Effective F.L. Back F.L. Wavelength -138mm -141mm 0.633µm -139mm -142mm 1.064µm -143mm -146mm 3.0µm -150mm -152mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.

CaF₂ 柱面透镜:

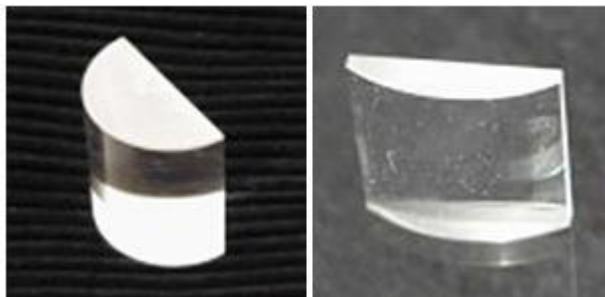

订购信息:

订购型号	规格	曲率	焦距	CaF ₂ 等级
CAF25-25LENS25C	25mm x 25mm 平凸半圆柱	12.5 (±2%)	25mm @ 3μm	IR 平凸
CAF25-25LENS350C	25mm x 25mm	150 (±2%)	350mm @ 3μm	IR 平凸