



IR 抛光氟化钙 CaF₂ 平凸正透镜 (直径 31.5mm 焦距 60mm)



描述

氟化钙在紫外到中红外 (250nm~7um) 之间都有很高的透射率, 所以广泛被用于制造棱镜, 透镜, 窗片, 氟化钙透镜具有低折射率, 高激光损伤阈值, 低同轴与径向应力双折射特性, 适合于准分子激光器使用, 或者集成于红外系统上。且氟化钙也备有低可溶性, 也可抵抗恶劣环境。氟化钙的抛光面可以工作数年之久, 氟化钙的硬度是氟化钡的两倍, 而且抗热冲击能力更强。

产品特点

透射波长范围广, 低折射率, 高透射率, 高损伤阈值, 低可溶性

产品型号

CAF31.5LENS60





应用领域

中红外QCL激光器

中红外激光光路搭建

核心参数

规格尺寸	焦距F.L.	曲率	透镜等级
31.5mm	60mm @ 3μm	27.50 (±2%)	IR 平凸

详细参数

名称	参数
透射范围	0.13~10um
折射率	1.39908 at 5um
反射损耗	5.4% at 5um
吸收系数	$7.8 \times 10^{-4} \text{cm}^{-1}$ @ 2.7um
吸收峰	35um
dn/dT	$-10.6 \times 10^{-6} / ^\circ\text{C}$
dn/du=0	dn/du=0
密度	3.18g/cc



熔点	1360℃
导热率	9.71Wm ⁻¹ K ⁻¹
热膨胀	18.85×10 ⁻⁶ /℃
硬度	Knoop 158.3
比热容	854J Kg ⁻¹ K ⁻¹
介电常数	6.76 at 1MHz
杨氏模量	75.8GPa
剪切模量	33.77GPa
体积模量	82.71GPa
弹性系数	C ₁₁ =164 ,C ₁₂ =53 ,C ₄₄ =33.7
表现弹性极限	36.54MPa
泊松比	0.26
溶解度	0.0017g/100g with, 20 °C
分子量	78.08

类型/结构	立方裂解
反射损耗	5.4% at 5um


折射率:(No=Ordinary Ray 普通射线)


um	No	um	No	um	No
0.54	2.6754	0.58	2.6312	0.62	2.5994
0.66	2.5755	0.7	2.5568	0.74	2.5418
0.78	2.5295	0.82	2.5193	0.86	2.5107
0.90	2.5034	0.94	2.4971	0.98	2.4916
1.0	2.4892	1.4	2.4609	1.8	2.4496
2.2	2.4437	2.6	2.4401	3.0	2.4376
3.4	2.4356	3.8	2.4339	4.2	2.4324
4.6	2.4309	5.0	2.4295	5.4	2.4281
5.8	2.4266	6.2	2.4251	6.6	2.4235
7.0	2.4218	7.4	2.4201	7.8	2.4183

8.2	2.4163	8.6	2.4143	9.0	2.4122
9.4	2.4100	9.8	2.4077	10.2	2.4053
10.6	2.4028	11.0	2.4001	11.4	2.3974
11.8	2.3945	12.2	2.3915	12.6	2.3883
13.0	2.3850	13.4	2.3816	13.8	2.3781
14.2	2.3744	14.6	2.3705	15.0	2.3665
15.4	2.3623	15.8	2.3579	16.2	2.3534
16.6	2.3487	17.0	2.3438	17.4	2.3387
17.8	2.3333	18.2	2.3278		

特性曲线

光谱透射图

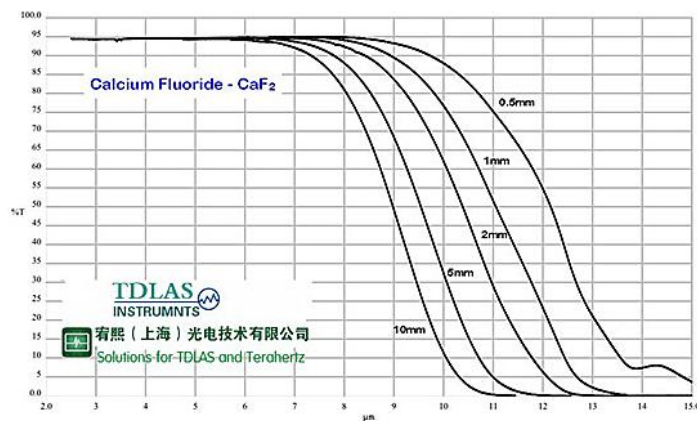

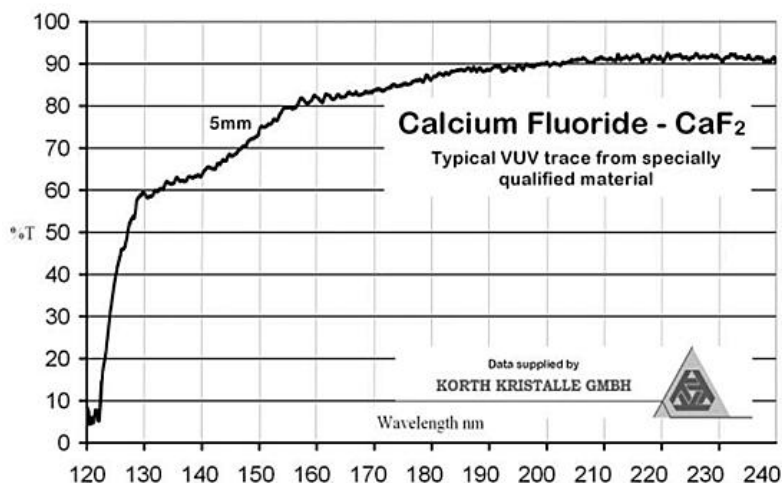

订购信息

订购型号	规格	曲率	焦距	CaF2 等级	参数															
CAF12.7L ENS10U	12.7mm Ø	10.16 (±2%)	10mm @ 300nm	UV 双凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 300mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.6mm (±0.1mm) Radius of Curvature 1: 120 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>277mm</td><td>276mm</td><td>0.633µm</td></tr><tr><td>280mm</td><td>278mm</td><td>1.064µm</td></tr><tr><td>287mm</td><td>286mm</td><td>3.0µm</td></tr><tr><td>300mm</td><td>299mm</td><td>5.0µm</td></tr></table> Parallel F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	277mm	276mm	0.633µm	280mm	278mm	1.064µm	287mm	286mm	3.0µm	300mm	299mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
277mm	276mm	0.633µm																		
280mm	278mm	1.064µm																		
287mm	286mm	3.0µm																		
300mm	299mm	5.0µm																		
CAF12.7L ENS12	12.7mm Ø	12.0 (±2%)	12.7mm @ 5µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 12.7mm Ø X 12.7mm F.L. @ 0.633µm MATERIAL: IR Grade CaF₂ Diameter: 12.7mm (+0.0/-0.127mm) Centre Thickness: 6.0mm (±0.127mm) Radius of Curvature 1: 12.0 (±2%) Radius of Curvature 2: 12.0 (±2%) S/D: 60/40 Edge thickness: 1.5mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>15.0mm</td><td>12.7mm</td><td>0.633µm</td></tr><tr><td>15.5mm</td><td>13.2mm</td><td>3.0µm</td></tr><tr><td>16.2mm</td><td>13.9mm</td><td>5.0µm</td></tr></table> Parallel F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	15.0mm	12.7mm	0.633µm	15.5mm	13.2mm	3.0µm	16.2mm	13.9mm	5.0µm			
Effective F.L.	Back F.L.	Wavelength																		
15.0mm	12.7mm	0.633µm																		
15.5mm	13.2mm	3.0µm																		
16.2mm	13.9mm	5.0µm																		

CAF12.7L ENS12U	12.7mm Ø	12.0 (±2%)	12mm @ 300nm	UV 双凸	
CAF12.7L ENS100	12.7mm Ø	40.32 (±2%)	100mm @ 5µm	IR 平凸	CALCIUM FLUORIDE BI-CONVEX LENS 25mm Ø X 100mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 4.0mm (±0.1mm) Radius of Curvature 1: 78.94 (±2%) Radius of Curvature 2: 78.94 (±2%) S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. 92mm Back F.L. 90mm Wavelength 0.633µm 93mm 91mm 1.064µm 95mm 94mm 3.0µm 100mm 98mm 5.0µm Parallel FL Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF16LE NS90	16.0mm Ø	73.90 (±2%)	90mm @ 3µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 16mm Ø X 90mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 16.0mm (±0.1mm) Centre Thickness: 3.0mm (±0.1mm) Radius of Curvature 1: 73.90 (±2%) Radius of Curvature 2: 73.90 (±2%) S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. 86mm Back F.L. 85mm Wavelength 0.633µm 86mm 85mm 1.064µm 89mm 88mm 3.0µm 93mm 92mm 5.0µm Parallel FL Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF18.5L ENS26	18.5mm Ø	12.6 (±2%)	26mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 18.5mm Ø X 26mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 18.7mm (±0.25mm) Centre Thickness: 5.0mm (±0.2mm) Centration 3 Arc Minutes Radius of Curvature 1: 12.6 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.0mm (derived) Effective F.L. 29.1mm Back F.L. 25.6mm Wavelength 0.633µm 30.2mm 26.6mm 3.0µm 31.6mm 28.0mm 5.0µm Parallel FL Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.

CAF20LE NS50	20mm Ø	19.95 (±2%)	50mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 20mm Ø x 50mm F.L. @ 5µm MATERIAL: IR Grade CaF ₂ Diameter: 20.0mm (±0.1mm) Centre Thickness: 4.0mm (±0.1mm) Radius of Curvature 1: 19.95 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.3mm (derived) Effective F.L. Back F.L. Wavelength 46mm 43mm 0.633µm 47mm 44mm 1.064µm 48mm 45mm 3.0µm 50mm 47mm 5.0µm Paraxial F.L. Tolerances ±0% to nearest mm. EFL from thin lens formula. BFL is referenced from the back lens surface.
CAF25LE NS25U	25mm Ø	21.53 (±2%)	25mm @ 350nm	UV 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 25mm Ø X 25mm F.L. @ 0.35µm MATERIAL: UV Grade CaF ₂ Diameter: 25.0mm (+0.0/-0.1mm) Centre Thickness: 10mm (±0.1mm) Radius of Curvature 1: 21.53 (±2%) Radius of Curvature 2: 21.53 (±2%) S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. Pr. Plane F.L. Back F.L. Wavelength 26.0mm 25.0mm 22.2mm 0.35µm 26.8mm 23.0mm 0.633µm Paraxial F.L. Tolerances ±0% EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS25	25mm Ø	20.80 (±2%)	25.4mm @ 3µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 25mm Ø X 25.4mm F.L. @ 3µm MATERIAL: IR Grade CaF ₂ Diameter: 25.0mm (+0.0/-0.1mm) Centre Thickness: 10mm (±0.1mm) Radius of Curvature 1: 20.80 (±2%) Radius of Curvature 2: 20.80 (±2%) S/D: 60/40 Edge thickness: 1.6mm (derived) Effective F.L. Pr. Plane F.L. Back F.L. Wavelength 25.9mm 22.2mm 22.4mm 0.633µm 26.2mm 22.4mm 1.064µm 26.8mm 23.0mm 3.0µm 28.0mm 24.1mm 5.0µm Paraxial F.L. Tolerances ±0% EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS50B	25mm Ø	39.1 (±2%)	50mm @ 5µm	IR 双凸	
CAF25LE NS50	25mm Ø	20.9 (±2%)	50mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø x 50mm F.L. @ 3µm MATERIAL: IR Grade CaF ₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 6.1mm (±0.1mm) Radius of Curvature 1: 20.9 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) Effective F.L. Back F.L. Wavelength 48mm 44mm 0.633µm 49mm 45mm 1.064µm 50mm 45mm 3.0µm 52mm 48mm 5.0µm Paraxial F.L. Tolerances ±0% to nearest mm. EFL from thin lens formula. BFL is referenced from the back lens surface.

CAF25LE NS50U	25mm Ø	22.96 (±2%)	50mm @ 350nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø x 50mm F.L. @ 0.35µm MATERIAL: UV Grade CaF₂ Diameter:25.0mm (±0.1mm) Centre Thickness:5.7mm (±0.1mm) Radius of Curvature 1:22.96mm (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.51mm Back F.L.47mm Wavelength0.35 µm 53mm 49mm 0.633µm 54mm 49mm 1.064µm 55mm 51mm 3.0µm 57mm 53mm 5.0µm Parallel F.L. Tolerances ±5% to nearest mm EFL from thin lens formula. BFL is referenced from the back lens surface.
CAF25LE NS75	25mm Ø	31.35 (±2%)	75mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø x 75mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter:25.0mm (±0.1mm) Centre Thickness:4.6mm (±0.1mm) Radius of Curvature 1:31.35 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.72mm Back F.L.69mm Wavelength0.633µm 73mm 70mm 1.064µm 75mm 72mm 3.0µm 78mm 75mm 5.0µm Parallel F.L. Tolerances ±5% to nearest mm EFL from thin lens formula. BFL is referenced from the back lens surface.
CAF25LE NS100B	25mm Ø	78.94 (±2%)	100mm @ 3µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 25mm Ø X 100mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter:25.0mm (±0.1mm) Centre Thickness:4.0mm (±0.1mm) Radius of Curvature 1:78.94 (±2%) Radius of Curvature 2:78.94 (±2%) S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.92mm Back F.L.90mm Wavelength0.633µm 93mm 91mm 1.064µm 95mm 94mm 3.0µm 100mm 98mm 5.0µm Parallel F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS100	25mm Ø	43.73 (±2%)	100mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 50mm Ø X 100mm F.L. @ 1µm MATERIAL: IR Grade CaF₂ Diameter:50.0mm (±0.1mm) Centre Thickness:10.0mm (±0.1mm) Radius of Curvature 1:43.0 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.99mm Back F.L.92mm Wavelength0.633µm 100mm 93mm 1.064µm 103mm 96mm 3.0µm 108mm 101mm 5.0µm Parallel F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS100U	25mm Ø	43.73 (±2%)	100mm @ 350nm	UV 平凸	

CAF25LE NS130	25mm Ø	55.35 (±2%)	130mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 130mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter:25.0mm (±0.1mm) Centre Thickness:3.0mm (±0.1mm) Radius of Curvature 1:55.35 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:1.5mm (derived) Effective F.L.128mm Back F.L.126mm Wavelength0.633µm 129mm 128mm 1.064µm 133mm 130mm 3.0µm 139mm 136mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS150	25mm Ø	61.0 (±2%)	150mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 150mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter:25.0mm (±0.1mm) Centre Thickness:3.3mm (±0.1mm) Radius of Curvature 1:61.0 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.141mm Back F.L.139mm Wavelength0.633µm 142mm 140mm 1.064µm 146mm 144mm 3.0µm 152mm 150mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS150U	25mm Ø	69.75 (±2%)	150mm @ 350nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 150mm F.L. @ 350nm MATERIAL: UV Grade CaF₂ Diameter:25.0mm (±0.1mm) Centre Thickness:3.1mm (±0.1mm) Radius of Curvature 1:69.75 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.156mm Back F.L.154mm Wavelength0.350µm 161mm 159mm 0.633µm 163mm 161mm 1.064µm 167mm 165mm 3.0µm 175mm 173mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS200U	25mm Ø	90.39 (±2%)	200mm @ 350nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 200mm F.L. @ 350nm MATERIAL: UV Grade CaF₂ Diameter:25.0mm (±0.1mm) Centre Thickness:2.9mm (±0.1mm) Radius of Curvature 1:90.39 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.202mm Back F.L.200mm Wavelength0.350µm 209mm 207mm 0.633µm 210mm 209mm 1.064µm 217mm 214mm 3.0µm 226mm 224mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.

CAF25LE NS300	25mm Ø	120.0 (±2%)	300mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 300mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.6mm (±0.1mm) Radius of Curvature 1: 120 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>277mm</td><td>276mm</td><td>0.633µm</td></tr><tr><td>280mm</td><td>278mm</td><td>1.064µm</td></tr><tr><td>287mm</td><td>286mm</td><td>3.0µm</td></tr><tr><td>300mm</td><td>299mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances: ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	277mm	276mm	0.633µm	280mm	278mm	1.064µm	287mm	286mm	3.0µm	300mm	299mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
277mm	276mm	0.633µm																		
280mm	278mm	1.064µm																		
287mm	286mm	3.0µm																		
300mm	299mm	5.0µm																		
CAF25LE NS500	25mm Ø	202.02 (±2%)	500mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25mm Ø X 500mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.4mm (±0.1mm) Radius of Curvature 1: 202 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>467mm</td><td>465mm</td><td>0.633µm</td></tr><tr><td>471mm</td><td>469mm</td><td>1.064µm</td></tr><tr><td>483mm</td><td>482mm</td><td>3.0µm</td></tr><tr><td>506mm</td><td>504mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances: ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	467mm	465mm	0.633µm	471mm	469mm	1.064µm	483mm	482mm	3.0µm	506mm	504mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
467mm	465mm	0.633µm																		
471mm	469mm	1.064µm																		
483mm	482mm	3.0µm																		
506mm	504mm	5.0µm																		
CAF25.4L ENS200	25.4mm Ø	80.7 (±2%)	200mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 25.4mm Ø X 200mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 25.4mm (+0.0 / -0.127mm) Centre Thickness: 2.64mm (±0.127mm) Radius of Curvature 1: 80.7 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 1.65mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>187mm</td><td>185mm</td><td>0.633µm</td></tr><tr><td>188mm</td><td>186mm</td><td>1.064µm</td></tr><tr><td>193mm</td><td>191mm</td><td>3.0µm</td></tr><tr><td>202mm</td><td>200mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances: ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	187mm	185mm	0.633µm	188mm	186mm	1.064µm	193mm	191mm	3.0µm	202mm	200mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
187mm	185mm	0.633µm																		
188mm	186mm	1.064µm																		
193mm	191mm	3.0µm																		
202mm	200mm	5.0µm																		
CAF27LE NS50	27mm Ø	43.10 (±2%)	50mm @ 3µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 27mm Ø X 50mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 27.0mm (±0.1mm) Centre Thickness: 6.4mm (±0.1mm) Radius of Curvature 1: 43.10 (±2%) Radius of Curvature 2: 43.10 (±2%) S/D: 60/40 Edge thickness: 2.1mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>51mm</td><td>48.7mm</td><td>0.633µm</td></tr><tr><td>51mm</td><td>49.2mm</td><td>1.064µm</td></tr><tr><td>53mm</td><td>50.5mm</td><td>3.0µm</td></tr><tr><td>55mm</td><td>52.8mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances: ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	51mm	48.7mm	0.633µm	51mm	49.2mm	1.064µm	53mm	50.5mm	3.0µm	55mm	52.8mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
51mm	48.7mm	0.633µm																		
51mm	49.2mm	1.064µm																		
53mm	50.5mm	3.0µm																		
55mm	52.8mm	5.0µm																		

CAF30LE NS70	30mm Ø	57.00 (±2%)	70mm @ 4µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 30mm Ø X 70mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter:30.0mm (±0.1mm) Centre Thickness:6.0mm (±0.1mm) Radius of Curvature 1:57.0 (±2%) Radius of Curvature 2:57.0 (±2%) S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L.67mm Back F.L.65mm Wavelength0.633µm 67mm65mm1.064µm 69mm67mm3.0µm 72mm70mm5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF31.5L ENS60	31.5mm Ø	27.50 (±2%)	60mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 31.5mm Ø X 60mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter:31.5mm (±0.1mm) Centre Thickness:6.8mm (±0.1mm) Radius of Curvature 1:27.5 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:1.8mm (derived) Effective F.L.64mm Back F.L.59mm Wavelength0.633µm 64mm59mm1.064µm 65mm61mm3.0µm 69mm64mm5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF38.1L ENS75	38.1mm Ø	33.84 (±2%)	75mm @ 4.5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 75mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter:38.1mm (±0.1mm) Centre Thickness:9.0mm (±0.1mm) Radius of Curvature 1:33.84 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:3.1mm (derived) Effective F.L.78mm Back F.L.72mm Wavelength0.633µm 78mm72mm1.064µm 81mm75mm3.0µm 85mm78mm5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF38.1L ENS75U	38.1mm Ø	33.84 (±2%)	66mm @ 248nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 75mm F.L. @ 3µm* MATERIAL: UV Grade CaF₂ Diameter:38.1mm (±0.1mm) Centre Thickness:9.0mm (±0.1mm) Radius of Curvature 1:33.84 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:3.1mm (derived) Effective F.L.72mm Back F.L.68mm Wavelength0.248µm 78mm72mm0.633µm 79mm73mm1.064µm 81mm75mm3.0µm 85mm78mm5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.

CAF38.1L ENS160	38.1mm Ø	68.16 (±2%)	160mm @ 3μm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 160mm F.L. @ 3μm MATERIAL: IR Grade CaF₂ Diameter:38.1mm (+0.1 / -0.2mm) Centre Thickness:4.5mm (±0.1mm) Radius of Curvature 1:68.16 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:1.8mm (derived) Effective F.L. 157mm 159mm 163mm 171mm Back F.L. 154mm 156mm 160mm 167mm Wavelength 0.633μm 1.064μm 3.0μm 5.0μm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF38.1L ENS250U	38.1mm Ø	100 (±2%)	215mm @ 248nm	UV 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 250mm F.L. @ 5μm MATERIAL: UV Grade CaF₂ Diameter:38.1mm (±0.1mm) Centre Thickness:3.8mm (±0.1mm) Radius of Curvature 1:100.0 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:2.0mm (derived) Effective F.L. 213mm 231mm 233mm 240mm 250mm Back F.L. 211mm 229mm 231mm 237mm 247mm Wavelength 0.248μm 0.633μm 1.064μm 3.0μm 5.0μm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF38.1L ENS475	38.1mm Ø	190.35 (±2%)	475mm @ 5μm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 38.1mm Ø X 475mm F.L. @ 5μm MATERIAL: IR Grade CaF₂ Diameter:38.1mm (+0.05 / -0.0mm) Centre Thickness:4.0mm (±0.1mm) Radius of Curvature 1:190.35 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:3.0mm (derived) Effective F.L. 440mm 444mm 456mm 477mm Back F.L. 437mm 442mm 453mm 474mm Wavelength 0.633μm 1.064μm 3.0μm 5.0μm Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF40LE NS120	40mm Ø	50.25 (±2%)	120mm @ 3μm	UV 平凸	

CAF40LE NS150	40mm Ø	64 (±2%)	150mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 40mm Ø X 150mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter:40.0mm (±0.1mm) Centre Thickness:4.1mm (±0.1mm) Radius of Curvature 1:64.0 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:1.0mm (derived) Effective F.L.148mm Back F.L.145mm Wavelength0.633µm 149mm 146mm 1.064µm 153mm 150mm 3.0µm 160mm 157mm 5.0µm Parallel F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF40LE NS200	40mm Ø	85 (±2%)	200mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 40mm Ø X 200mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter:40.0mm (±0.1mm) Centre Thickness:3.3mm (±0.1mm) Radius of Curvature 1:85.0 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:1.0mm (derived) Effective F.L.196mm Back F.L.194mm Wavelength0.633µm 198mm 196mm 1.064µm 203mm 201mm 3.0µm 212mm 210mm 5.0µm Parallel F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.
CAF40LE NS330	40mm Ø	138 (±2%)	330mm @ 3µm	IR 平凸	
CAF40LE NS440	40mm Ø	187 (±2%)	440mm @ 3µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 40mm Ø X 440mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter:40.0mm (±0.1mm) Centre Thickness:2.0mm (±0.1mm) Radius of Curvature 1:187.0 (±2%) Radius of Curvature 2:Plano S/D:60/40 Edge thickness:1.0mm (derived) Effective F.L.432mm Back F.L.431mm Wavelength0.633µm 436mm 435mm 1.064µm 448mm 446mm 3.0µm 468mm 467mm 5.0µm Parallel F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.

CAF50LE NS80	50mm Ø	65.6 (±2%)	80mm @ 5µm	IR 平凸	CALCIUM FLUORIDE BI-CONVEX LENS 50mm Ø X 80mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 50.0mm (±0.1mm) Centre Thickness: 19.9mm (±0.1mm) Radius of Curvature 1: 65.6 (±2%) Radius of Curvature 2: 65.6 (±2%) S/D: 60/40 Edge thickness: 10mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>79mm</td><td>72mm</td><td>0.633µm</td></tr><tr><td>80mm</td><td>73mm</td><td>1.064µm</td></tr><tr><td>82mm</td><td>75mm</td><td>3.0µm</td></tr><tr><td>86mm</td><td>78mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	79mm	72mm	0.633µm	80mm	73mm	1.064µm	82mm	75mm	3.0µm	86mm	78mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
79mm	72mm	0.633µm																		
80mm	73mm	1.064µm																		
82mm	75mm	3.0µm																		
86mm	78mm	5.0µm																		
CAF50LE NS100	50mm Ø	43.0 (±2%)	100mm @ 1µm	IR 双凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 50mm Ø X 100mm F.L. @ 1µm MATERIAL: IR Grade CaF₂ Diameter: 50.0mm (±0.1mm) Centre Thickness: 10.0mm (±0.1mm) Radius of Curvature 1: 43.0 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2.0mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>99mm</td><td>92mm</td><td>0.633µm</td></tr><tr><td>100mm</td><td>93mm</td><td>1.064µm</td></tr><tr><td>103mm</td><td>96mm</td><td>3.0µm</td></tr><tr><td>108mm</td><td>101mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	99mm	92mm	0.633µm	100mm	93mm	1.064µm	103mm	96mm	3.0µm	108mm	101mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
99mm	92mm	0.633µm																		
100mm	93mm	1.064µm																		
103mm	96mm	3.0µm																		
108mm	101mm	5.0µm																		
CAF50LE NS135	50mm Ø	57.0 (±2%)	135mm @ 5µm	IR 平凸	CALCIUM FLUORIDE PLANO-CONVEX LENS 50mm Ø X 135mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 50.0mm (±0.1mm) Centre Thickness: 7.8mm (±0.1mm) Radius of Curvature 1: 57 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 2mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>132mm</td><td>126mm</td><td>0.633µm</td></tr><tr><td>133mm</td><td>128mm</td><td>1.064µm</td></tr><tr><td>136mm</td><td>131mm</td><td>3.0µm</td></tr><tr><td>143mm</td><td>137mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	132mm	126mm	0.633µm	133mm	128mm	1.064µm	136mm	131mm	3.0µm	143mm	137mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
132mm	126mm	0.633µm																		
133mm	128mm	1.064µm																		
136mm	131mm	3.0µm																		
143mm	137mm	5.0µm																		
CAF50LE NS250	50mm Ø	198.9 (±2%)	250mm @ 5µm	IR 双凸	CALCIUM FLUORIDE BI-CONVEX LENS 50mm Ø X 250mm F.L. @ 5µm MATERIAL: IR Grade CaF₂ Diameter: 50.0mm (±0.1mm) Centre Thickness: 6.2mm (±0.1mm) Radius of Curvature 1: 198.9 (±2%) Radius of Curvature 2: 198.9 (±2%) S/D: 60/40 Edge thickness: 3mm (derived) <table><tr><td>Effective F.L.</td><td>Back F.L.</td><td>Wavelength</td></tr><tr><td>231mm</td><td>229mm</td><td>0.633µm</td></tr><tr><td>233mm</td><td>231mm</td><td>1.064µm</td></tr><tr><td>239mm</td><td>237mm</td><td>3.0µm</td></tr><tr><td>250mm</td><td>248mm</td><td>5.0µm</td></tr></table> Paraxial F.L. Tolerances ±2% to nearest mm EFL from thin lens formula. BFL is referenced from the lens surface.	Effective F.L.	Back F.L.	Wavelength	231mm	229mm	0.633µm	233mm	231mm	1.064µm	239mm	237mm	3.0µm	250mm	248mm	5.0µm
Effective F.L.	Back F.L.	Wavelength																		
231mm	229mm	0.633µm																		
233mm	231mm	1.064µm																		
239mm	237mm	3.0µm																		
250mm	248mm	5.0µm																		

CaF₂ 负透镜




订购信息:

订购型号	规格	曲率	焦距	CaF2 等级	参数
CAF25LE NS-50	25mm Ø	-20.40 (±2%)	-50mm @ 3µm	IR 平凹	CALCIUM FLUORIDE PLANO-CONCAVE LENS 25mm Ø X -50mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 3.0mm (±0.1mm) Radius of Curvature 1: -20.40 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 7.3mm (derived) Effective F.L. Back F.L. Wavelength -47mm -49mm 0.633µm -48mm -50mm 1.064µm -49mm -51mm 3.0µm -51mm -53mm 5.0µm Paraxial FL Tolerances ±2% to nearest mm. EFL from thin lens formula. BFL is referenced from the lens surface.
CAF25LE NS-100	25mm Ø	-40.32 (±2%)	-100mm @ 3µm	IR 平凹	CALCIUM FLUORIDE PLANO-CONCAVE LENS 25mm Ø X -100mm F.L. @ 3µm MATERIAL: IR Grade CaF₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.0mm (±0.1mm) Radius of Curvature 1: -40.32 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 3.8mm (derived) Effective F.L. Back F.L. Wavelength -93mm -95mm 0.633µm -94mm -96mm 1.064µm -97mm -98mm 3.0µm -101mm -102mm 5.0µm Paraxial FL Tolerances ±2% to nearest mm. EFL from thin lens formula. BFL is referenced from the lens surface.

CAF25LE NS-150	25mm Ø	-59.85 (±2%)	-150mm @ 5µm	IR 平 凹	CALCIUM FLUORIDE PLANO-CONCAVE LENS 25mm Ø X -150mm F.L. @ 5µm MATERIAL: IR Grade CaF ₂ Diameter: 25.0mm (±0.1mm) Centre Thickness: 2.1mm (±0.1mm) Radius of Curvature 1: -59.85 (±2%) Radius of Curvature 2: Plano S/D: 60/40 Edge thickness: 3.3mm (derived) Effective F.L. Back F.L. Wavelength -138mm -141mm 0.633µm -139mm -142mm 1.064µm -143mm -146mm 3.0µm -150mm -152mm 5.0µm Paraxial F.L. Tolerances ±2% to nearest mm EFL from the lens formula. BFL is referenced from the lens surface.

CaF₂ 柱面透镜:

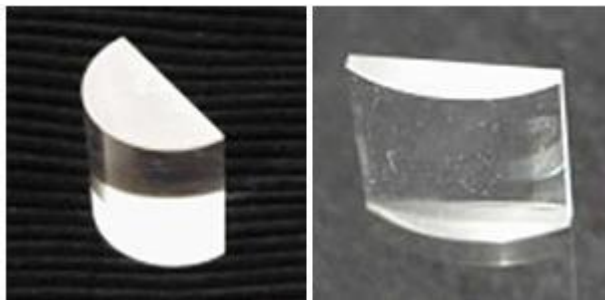

订购信息:

订购型号	规格	曲率	焦距	CaF ₂ 等级
CAF25-25LENS25C	25mm x 25mm 平凸半圆柱	12.5 (±2%)	25mm @ 3µm	IR 平凸
CAF25-25LENS350C	25mm x 25mm	150 (±2%)	350mm @ 3µm	IR 平凸

