


633nm 2x3 保偏耦合器模块(定制产品)

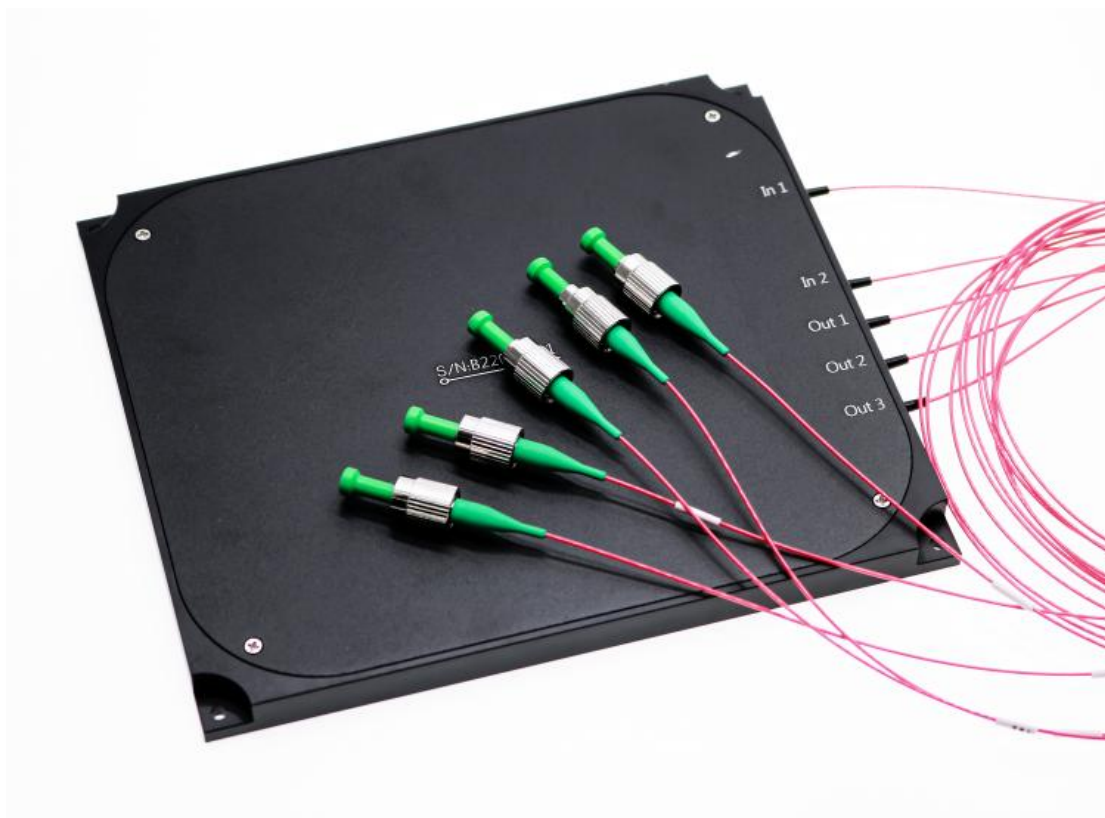

产品描述

筱晓上海光子定制产品


产品型号

VIS-FC-W0633-S23-CR1090-1-9-PA

核心参数

中心波长	连接器
633nm	FC/APC

尺寸图

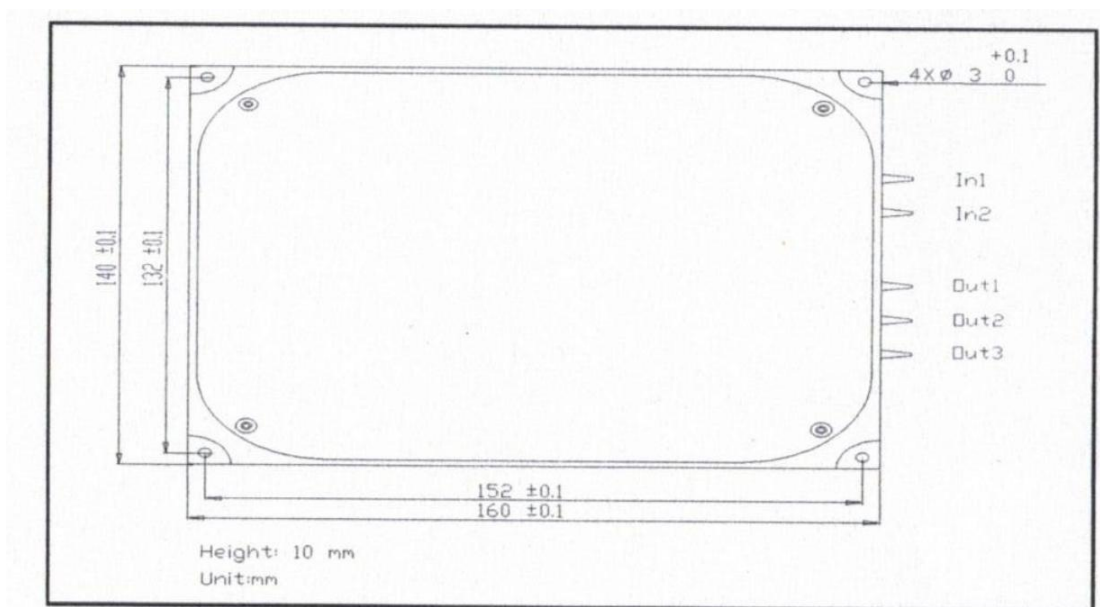

核心参数

Parameters	Unit	Specification	Test Data
Center Wavelength	/	633	633
Operating Wavelength Range	nm	±10	±10
Max. Insertion Loss (In1 → Out1, In2 → Out3); +0.3dB connector loss	dB	13.3	11.47/10.78
Max. Insertion Loss (In1 → Out2, In2 → Out2); +0.3dB connector loss	dB	7.5	5.75/5.01
Min. Extinction Ratio (In1 → Out1, In2 → Out3); -2dB connector loss	dB	12	16/17
Min. Extinction Ratio (In1 → Out2, In2 → Out2); -2dB connector loss	dB	12	20/15
Min. Optical Return Loss; -5dB connector loss	dB	35	Pass
Connector type	FC/APC		
Fiber type	900um loose tube Nufern PM630-HP Fiber		
Axis Alignment	Both Axis working		
Fiber Length	m	1	
Max. Optical Power(CW)	mW	100	
Operating Temperature	°C	-5 to +70	
Storage Temperature	°C	-40 to +85	
Package Dimensions	mm	160*140*10	